



09/29/00

Express Mail Label No.: EK600532805US

Date Deposited: September 29, 2000

COMMISSIONER OF PATENTS
BOX PATENT APPLICATION
WASHINGTON, D.C. 20231

DOCKET NO. JP919990091 US1
Date: September 29, 2000

jc929 U.S. PTO
09/675883
09/29/00

Sir:

Transmitted herewith for filing is the Patent Application of:

Inventor: Nobuaki Takishita of Kanagawa, Japan

For: METHOD OF INDICATING USER STATUS IN GROUPWARE
AND APPRATUS FOR USE IN THE SAME

Enclosed are:

- X 24 Pages of Specification.
- X 11 Sheets of Informal Drawings.
- X Declaration and Power of Attorney is attached to the application.
- X Assignment with cover sheet
- X Associate Power of Attorney
- X Certified copy of Japanese Patent application 11-3079022
filed on 30 September 1999.

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	10- 20 =	0
INDEP CLAIMS	3- 3 =	0
____ MULTIPLE DEPENDENT CLAIM PRESENTED		

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$ 690.00
X \$ 18 =	\$ 0.00
X \$ 78 =	\$ 0.00
+ \$ 260=	\$ 0.00
TOTAL	\$ 690.00

X Please charge my Deposit Account No. 50-0510 in the amount
of \$ 690.00.

X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-0510. A duplicate copy of this sheet is enclosed.

___ Any additional filing fees required under 37 CFR 1.16.

___ Any patent application processing fees under 35 CFR 1.17.

Respectfully submitted,

By Anne Vachon Dougherty
Anne Vachon Dougherty, Esq.
Registration No.: 30,374
Tel. (914) 962-5910

006650-6867360

Enclosures

On behalf of IBM CORPORATION
Anne Vachon Dougherty, Esq.
3173 Cedar Road
Yorktown Heights, NY 10598

Method of Indicating User Status in Groupware and Apparatus for Use in the Same

Field of the Invention

The present invention relates to a method of indicating a user status in groupware for exchanging information between groups by using a network, for the purpose of recognizing each status of users composing each group, and an apparatus for use in the same. More particularly, the invention relates to a method of indicating a user status in groupware, which enables each user to recognize the status whether or not each user has read each document, and an apparatus for use in the same.

Background of the Invention

Heretofore, various types of groupware have been known as software for exchanging information between groups by using a network. Such groupware are configured so as to assist the following application. Each document or each document group consisting of a plurality of documents, which users themselves or other users have entered or changed, is listed in a view window of each user so that all the users can read each document or each document group. Then, all the users composing the group

read each document or each document group issued by other users and give opinions on each document or each document group so that all the users can have an exchange of opinions or a discussion.

Fig. 14 is an illustration of one example of the view window of the user in the conventional groupware. In the example shown in Fig. 14, a document list is typically displayed in a view pane on the right side. An asterisk is displayed on the left end of each document or each document group in the view pane or a title or the like of the document is displayed in red, whereby the user can determine whether or not he/she has already read the document.

However, in the conventional groupware, the user can recognize only whether or not he/she has already read the displayed document or document group, and the user cannot recognize whether or not other users have read the document or the document group. For example, when project members use a discussion database, the members cannot recognize whether or not specific members have read the document entered or changed by the members themselves or other members.

That is, when the database using such groupware is used, work always progresses on the assumption that others have read each document. A meeting can show who are present at the meeting. However, when such a database is used like an actual meeting, it, in fact, often happens that some members have not

read the document because they are busy or because they take a day off or a holiday or they are on a business trip. This may hinder or delay the progress of the work. There is no problem in a system enabling each member to recognize to whom the document has been passed among regular members, such as a circular document. However, the discussion database, in which the contents of the document being used are being rapidly changed one after another, as in the case of the meeting, does not have means for recognizing whether or not other members have read each document, as described above.

Moreover, due to the above problem, a person who manages the project cannot ascertain whether or not all the project members take part in the discussion. Furthermore, the members can recognize who has prepared or edited each document by checking properties of each document, but there is no means for checking whether or not the members composing the group have read the changed document after the document has been finally changed.

The following technique is disclosed as a method of managing a folder for making it easy to use groupware in Unexamined Japanese Patent Application Publication No. 7-84748. This technique is that it is made possible to define the folder having new attribute information or to edit the attribute information, whereby the shape or color of the folder is changed and displayed in accordance with the folder attribute

information and the change of the attribute information. However, although this technique can manage the whole folder, this technique cannot achieve an object of the invention, i.e., this technique does not allow each user to recognize whether or not each user has read each document or each document group.

It is an object of the present invention to solve the above problem and to provide a method of indicating a user status in groupware, which enables each user to recognize the status whether or not each of users composing the group has read each document or each document group displayed in the view window, and an apparatus for use in the same.

Summary of the Invention

A method of indicating a user status in groupware of the present invention relates to a method of indicating a user status for recognizing the user status in groupware. The method comprises the steps of (a) displaying a status row bar in a view window of each user; and (b) indicating the status whether or not each user has read each document by the displayed status row bar. Thus, by viewing the status row bar, the user can recognize the status whether or not each of the users composing a group has read each document or each document group displayed in the view window.

Preferred examples of the method of indicating a user status in groupware of the present invention are as follows. When the users are divided into groups, the status indication shows what percentage of the users of each group have read each document for each group. Moreover, when the documents are divided into document groups, each of which consists of a plurality of documents, the status indication shows whether at least one of the documents in each document group has not been read for each document group. Whether or not each user has read each document is indicated by colors or patterns. In any case, the method of indicating a user status in groupware of the present invention can be preferably implemented.

An apparatus for carrying out a method of indicating a user status in groupware of the present invention comprises a network; a server connected to the network and including a status database for storing the status whether or not each user has read or changed each document; a manager operation section connected to the network and including a manager screen and a manager input device; and a user operation section connected to the network and including at least one user screen and at least one user input device. A manager (in fact, a program running on a CPU) determines the status whether or not each user has read each document through the network. Thus, the program updates the status database. Thus, the program executes status displaying indicating the status whether or not each user has

read each document in the status row bar in the view window on each of the user screens of the users. Preferred examples of the apparatus are as follows. When the user finally changes a certain document, the statuses of the other users are set to "not read" in the status database. Moreover, a mail is sent to members of a specific group who have not read the document so as to urge these members to read the document. Thus, the method of indicating a user status in groupware of the present invention can be preferably carried out.

Brief Description of the Drawings

For a more complete understanding of the present invention and the advantages thereof, reference is now made to the following description taken in conjunction with the accompanying drawings, in which;

Fig. 1 shows a structure of one example of a status database for use in the present invention;

Fig. 2 shows one example of a view window of each user of the present invention;

Fig. 3 is a block diagram of a constitution of one example of an apparatus for carrying out a method of indicating a user status in groupware of the present invention;

Fig. 4 shows one example of change of data in the status database of the present invention;

Detailed Description of the Preferred Embodiments

Of a method of indicating a user status in groupware and an apparatus for use in the same of the present invention, the method of indicating a user status in groupware will be first described. The important point in the indication of the user status of the present invention is that the method includes displaying a status row bar in a view window of each user and indicating in the displayed status bar the status whether or not each user has read each document.

In indicating the user status, a group manager specifies, for example, a user group A which can be displayed in the status row bar. The manager specifies the user group A in order to reduce a load on a server and a network, because the specification of all the users increases the load on the server and the network. Next, the server includes and uses a status database having a structure shown as one example in Fig. 1. In the example shown in Fig. 1, the users composing the user group A are users A to D, and the documents are separate documents, i.e., a document 1-1, a document 1-2, a document 2 and a document 3, and a document group 1 consisting of the document 1-1 and the document 1-2. The status database has the data on whether or not each user has read each document or each document group and who has finally changed each document or has prepared a new document. Next, Fig. 2 shows one example of the view

005269" E8852958

window of each user. In the example shown in Fig. 2, by using the status database having the structure shown as one example in Fig. 1, whether or not each user, i.e., each of the users A to D composing the user group A has read each document listed in a topic column is indicated in the form of "read" or "not read" in a new status row bar, and who has finally changed each document or has prepared the new document is indicated in the form of "finally changed (including prepared)" in this new status row bar.

In the above-mentioned example, the specification of the user group depends on manager setting at first. However, this specification may be changed in accordance with the setting of the view window of each user. Moreover, in the above-described example, each row of the status row bar is displayed for each user. However, each row may be displayed for each user group, and what proportion of the users of the user group have read the document may be indicated by a shade of color. For example, a dark color may indicate that a high proportion of the users have read the document, and that a light color may indicate that few users have read the document. Furthermore, when the user does not want to indicate the status whether or not he/she has read a certain document and so on, the user specifies document properties of this document, whereby the user can specify this document so as not to recognize the contents of information in

the status row bar. In this case, the row of this document is displayed in black, for example.

Next, the apparatus for carrying out the method of indicating the user status in groupware of the present invention will be described. Fig. 3 is a block diagram of a constitution of one example of the apparatus for carrying out the method of indicating the user status in groupware of the present invention. In the example shown in Fig. 3, the apparatus of the invention comprises a network 6; a server connected to the network 6 and including a status database 1 for storing the status of each user to each document and a CPU 2; a manager operation section connected to the network 6 and including a manager screen 3, a CPU 4 and an input device 5; a user-A operation section connected to the network 6 and including a user screen A 9, a CPU 7 and an input device 8; and a user-B operation section connected to the network 6 and including a user screen B 12, a CPU 10 and an input device 11. It is needless to say that the number of users is not limited to two, i.e., the users A and B. One example of the operation of the above-mentioned apparatus is as follows. A program running on the CPU 2 determines the status whether or not each user has read each document through the network 6. And, the program updates the status database 1. Thus, the program executes status displaying indicating the status as to whether or not

each user has read each document in the status row bar in the view window on each of the user screens (9 and 12) of the users.

The contents of the status database 1 and the operation of the above-mentioned apparatus will be described below in detail. Fig. 4 shows one example of the change of data in the status database of the present invention. In the example shown in Fig. 4, a status database 201 has the data on the status of each of documents 1 to 5 to each of users A to D. In the status database 201, when the user C changes the document 3, the row of the document 3 is changed as shown in a row 202. That is, a cell of the user C is changed into "finally changed" in the row 202. At the time of this final change, the other users do not read the contents of the document 3 changed by the user C, and thus each of the cells of the users A, B and D is changed into "not read". Furthermore, when the user A reads the document 3, the row of the document 3 is changed as shown in a row 203. That is, the cell of the user A is changed into "read" in the row 203, and the status in the row 202 is kept as it is in each of the cells of the users B, C and D.

Fig. 5 is a flowchart for describing one example of processing for preparing or updating the document in the server. The processing for preparing or updating the document in the server will be described with reference to Fig. 5. First, in step 301, the user prepares a new document or updates the document, and the user registers the document in the server.

Then, in step 302, whether or not the registered document is an existing document is checked. When the result of the check shows that the registered document is the new document, the processing goes to step 303. In step 303, row data, which indicates that only the user who has prepared the document is in the "finally changed" status and the other users are in the "not read" status, is added to the status database. When the result of the check shows that the registered document is the existing document, the processing goes to step 304. In step 304, the existing row data is reset so that the status of the user who has changed the document may be indicated by "finally changed" and the statuses of the other users may be indicated by "not read". The processing for preparing or updating the document in the server ends after the above procedure.

Fig. 6 is a flowchart for describing one example of the processing for displaying the document in the server. The processing for displaying the document in the server will be described with reference to Fig. 6. First, in step 401, the user requests the server to display the document. Then, in step 402, whether or not the requesting user has read the requested document is checked. When the result of the check shows that the user has not read the document, the processing goes to step 403. In step 403, the cell of the requested document by the requesting user in the status database is set to "read", and the document is displayed to the user. When the result of the check

shows that the user has read the document, the document is displayed for the user without any processing.

Fig. 7 is a flowchart for describing one example of the processing of the user screen. The processing of the user screen will be described with reference to Fig. 7. First, in step 501, attribute information such as a document title and status database information are obtained from the server, and the information are displayed in the view window displayed on the user screen by using the status row bar. One example of the display is as shown in Fig. 2 discussed above. Then, in step 502, the status database information is obtained from the server at regular intervals, and the display is updated. Thus, the processing of the user screen ends.

Next, the processing for calculating a percentage of group members who have read the document will be described as a modification of the present invention described above. The processing for calculating the percentage of the group members who have read the document is performed as a function of the manager, when the user wants to set the status row bar for indicating what proportion of the group members have read the document by a shade of color, a difference in pattern or the like. Fig. 8 is a flowchart for describing one example of the processing for calculating the percentage of the group members who have read the document in the server. The processing for calculating the percentage of the group members who have read

the document in the server will be described with reference to Fig. 8. First, in step 701, whether or not the processing for calculating the percentage of the group members who have read the document is set with the manager function is checked. When the result of the check shows that this processing is set, what percentage of the members of the group specified for each document are in the "read" status is calculated for each group, and then the data on the percentage of the group members who have read the document is set. When the result of the check shows that this processing is not set, the processing for calculating the percentage of the group members who have read the document cannot be performed, and thus the processing ends without any processing. Fig. 9 shows one example of the structure of the database on the percentage of the group members who have read the document. In the example shown in Fig. 9, this database has the data on what percentage of the users composing each of groups A to C have read each of the documents 1 to 3.

The following examples are considered as an application of the above-described processing for calculating the percentage of the group members who have read the document. First, for example, when the document that is important but has been little read is on an intra-company bulletin board, the user can send the members of a specific group who have not read the document a mail urging these members to read the document, with a

database comprises the database for performing the function of setting a discussion database status row bar for use in the display for each user, and the database for performing the function of setting the status row bar indicating the percentage of the group members who have read the document, for use in the display for each group. The above two setting functions will be described below in conjunction with each database.

Description of the function of setting the discussion database status row bar

The database for performing this function comprises:

a discussion database for allowing each user to add or change each document;

a user management table (Fig. 10) that is a table of each user who can access the discussion database;

a status database (Fig. 1) having the row data on the contents of the users who are indicated by YES in an entry user item in the user management table; and

an each-user indication specification table (Fig. 11) for customizing the status row bar in which each user is indicated by default.

The function of setting the discussion database status row bar using the above-mentioned databases and tables is executed by the following functions.

*A function of setting an entry user

It is expected that many users can access the discussion database in some cases. The users to be indicated in the status row bar do not have to be all of the users who can access the discussion database. The users who require recording whether or not they have read each document are set by the manager screen so as not to degrade performance of the server. These users who should be set are specified by indicating YES in the entry user item in the user management table shown in Fig. 10.

*A function of setting a default screen

When the user screen is displayed, the users to be indicated in the status row bar are set by the default. This function is also set by the manager screen. These users are set by specifying an order in which these users are indicated in a default user item in the user management table shown in Fig 10.

*A user customize function

The status row bar of each of the users specified by the function of setting the default screen is displayed on the user screen, but the users to be indicated in the status row bar may differ according to users. By the user customize function, the status row bar inherent to each user is set by the user screen, and the status row bar is added to or corrected in the each-user indication specification table shown in Fig. 11. At the time of the setting, the list of the entry users is obtained from the user management table shown in Fig. 10, and the users to be indicated are selected from the list. To specify users other

than the entry users, user names are obtained from the user management table shown in Fig. 10, and the entry user items of the users to be specified are corrected to YES. Moreover, even when the users to be indicated are not included in the user management table shown in Fig. 10, the user having access to the discussion database adds the row of the user to be indicated to the user management table and sets the entry user item to YES.

Description of the function of setting the status row bar indicating the percentage of the group members who have read the document

The database for performing this function comprises:

a database comprising the document group such as a WEB homepage or each document;

a user-group association table (Fig. 12) that is a table of the users who can access the database and the group of these users;

a group indication table (Fig. 13) for specifying the group to be indicated in the status row bar on the user screen;

a status database (Fig. 1) having the row data on the contents of the users belonging to the group specified by the group indication table; and

a database on the percentage of the group members who have read the document (Fig. 9), for recording what proportion of the group members have read each document.

The function of setting the status row bar indicating the percentage of the group members who have read the document, using the above-described databases and tables is executed by the following functions.

*A group setting function

The group which each user belongs to is specified, and the user-group association table shown in Fig. 12 is set by the manager screen.

*A function of setting the user screen indicating the percentage of the group members who have read the document

The percentage of the group members who have read the document to be indicated in the status row bar is set. This function is also set by the manager screen. The order of indication is specified by setting the order of indication in the group indication table shown in Fig. 13.

Although the preferred embodiments of the present invention have been described in detail, it should be understood that various changes, substitutions can be made therein without departing from spirit and scope of the inventions as defined by the appended claims.

As is apparent from the above description, according to the present invention, the method of the invention includes displaying the status row bar in the view window of each user and indicating the status whether or not each user has read each document by the displayed status row bar. Thus, by viewing the

status row bar, the user can recognize the status whether or not each of the users composing the group has read each document or each document group displayed in the view window.

005250"0385/2960

CLAIMS

What is claimed is:

1. A method for indicating user status for at least one of a plurality of users of groupware, said method comprising the steps of:

(a) displaying a status row bar in a view window of each user; and

(b) providing a status indication indicating the user status in said displayed status row bar.

2. The method according to claim 1 wherein said user status indicates whether the at least one of the plurality of users has read a document.

3. The method according to claim 1, wherein when the users are divided into groups, said status indication shows what percentage of the users of each group have read each document for each group.

4. The method according to claim 1, wherein when the documents are divided into document groups, each of which consists of a plurality of documents, said status indication shows whether at least one of the documents in each document group has not been read for each document group.

5. The method according to claim 1, wherein said status indication is provided by colors or patterns.

6. An apparatus for carrying out a method of indicating a user status for at least one of a plurality of users of groupware, said apparatus comprising:

a server connected to a network and including a status database for storing a user status indication;

a manager operation section connected to said network and including a manager screen and a manager input device; and

a user operation section connected to said network and including at least one user screen and at least one user input device.

7. The apparatus according to claim 6 wherein said user status indication indicates whether a user has accessed a document in said groupware.

8. The apparatus according to claim 7, wherein when a user changes said document, the statuses of the other of said plurality of users are set to "not read" in said status database.

9. The apparatus according to claim 7, further comprising a mail generation component from which a mail is sent to members of a specific group who have not read the document.

10. A program storage device readable by machine, tangibly embodying a program of instructions executable by the machine to perform method steps for indicating user status for at least one of a plurality of users of groupware, said method comprising the steps of:

(a) displaying a status row bar in a view window of each user; and

(b) providing a status indication indicating the user status in said displayed status row bar.

006250" E885/960

Method of Indicating User Status in Groupware and
Apparatus for Use in the Same

Abstract of the Disclosure


Disclosed is a method of indicating a user status in groupware for recognizing the user status in the groupware. The method comprises the steps of (a) displaying a status row bar in a view window of each user; and (b) indicating the status whether or not each user has read each document by the displayed status row bar. To carry out the method, an apparatus comprises a network; a server connected to the network and including a status database for storing the status of each user to each document; a manager operation section connected to the network and including a manager screen and a manager input device; and a user operation section connected to the network and including at least one user screen and at least one user input device.

FIG. 1

	A-USER	B-USER	C-USER	D-USER
DOCUMENT 1-1	FINALLY CHANGED	READ	READ	NOT READ
DOCUMENT 1-2	NOT READ	FINALLY CHANGED	NOT READ	NOT READ
DOCUMENT GROUP 1 (DOCUMENTS 1-1 AND 1-2)	NOT READ (SOME DOCUMENTS NOT READ)	READ (ALL READ)	NOT READ (SOME DOCUMENTS NOT READ)	NOT READ (SOME DOCUMENTS NOT READ)
DOCUMENT 2	READ	FINALLY CHANGED	READ	NOT READ
DOCUMENT 3	READ	FINALLY CHANGED	READ	NOT READ

006260 " E889/960

FIG. 2

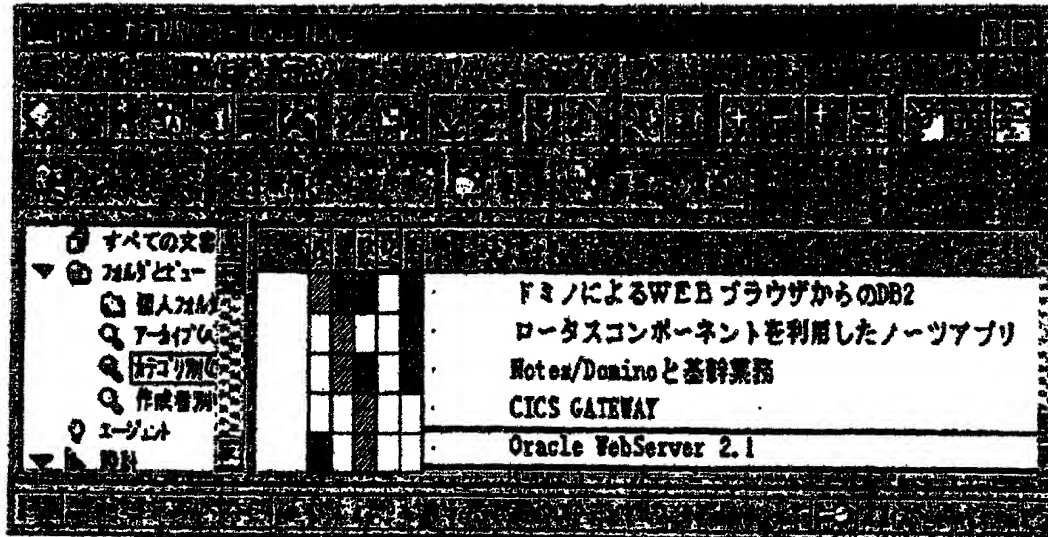

006260" 08852960

006250" 88892950

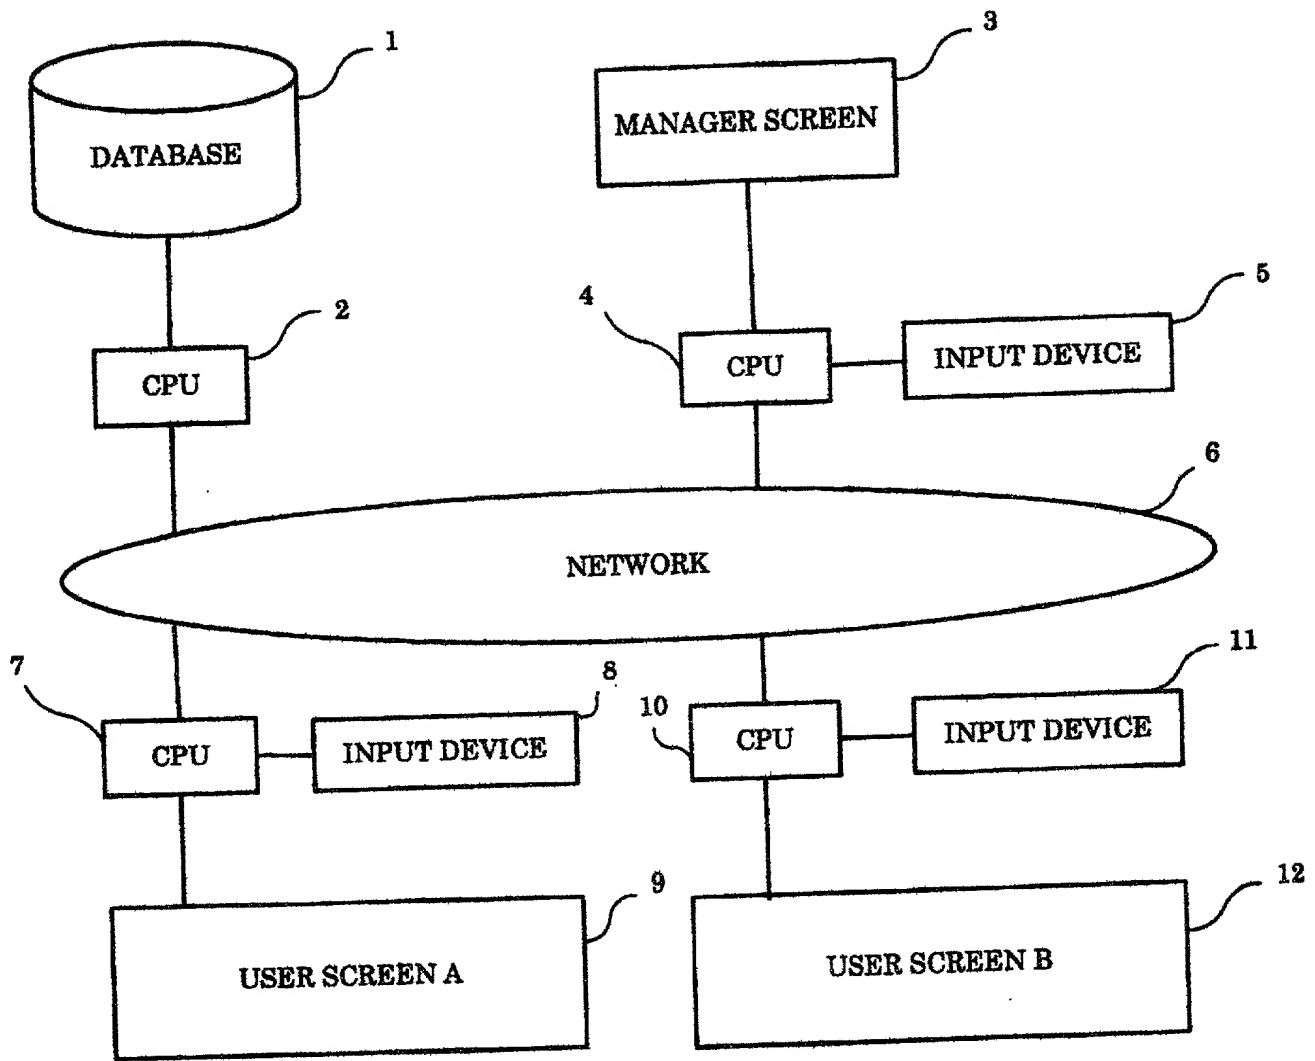


FIG. 4

	A-USER	B-USER	C-USER	D-USER
DOCUMENT 1	FINALLY CHANGED	READ	READ	NOT READ
DOCUMENT 2	NOT READ	FINALLY CHANGED	NOT READ	NOT READ
DOCUMENT 3	READ	FINALLY CHANGED	READ	NOT READ
DOCUMENT 4	READ	FINALLY CHANGED	NOT READ	NOT READ
DOCUMENT 5	NOT READ	FINALLY CHANGED	READ	NOT READ

C-USER CHANGES DOCUMENT 3


DOCUMENT 3	NOT READ	NOT READ	FINALLY CHANGED	NOT READ
------------	----------	----------	--------------------	----------

C-USER READS DOCUMENT 3

DOCUMENT 3	READ	NOT READ	FINALLY CHANGED	NOT READ
------------	------	----------	--------------------	----------

005260" E8852950

Table 1. Demographic characteristics of the study population	
Age (years)	65.5 ± 10.5
Gender	
Male	55.5%
Female	44.5%
Education (years)	12.5 ± 3.5
Marital status	
Married	65.5%
Single	34.5%
Occupation	
Retired	45.5%
Unemployed	35.5%
Employed	19.0%
Income (USD/month)	1,200 ± 300
Health status	
Good	60.5%
Fair	39.5%
Poor	0.0%
Comorbidities	
Hypertension	45.5%
Diabetes	35.5%
Cholesterol	25.5%
Arthritis	15.5%
Depression	10.5%
Medication use	
Yes	55.5%
No	44.5%
Medication type	
Antidepressants	15.5%
Antipsychotics	10.5%
Mood stabilizers	5.5%
Other	70.5%
Duration of illness (years)	10.5 ± 5.5
Family history	
Yes	35.5%
No	64.5%
Family size	3.5 ± 1.5
Family income (USD/month)	1,500 ± 400
Family education (years)	13.5 ± 4.5
Family health status	
Good	55.5%
Fair	40.5%
Poor	4.0%
Family comorbidities	
Hypertension	40.5%
Diabetes	30.5%
Cholesterol	20.5%
Arthritis	10.5%
Depression	5.5%
Family medication use	
Yes	45.5%
No	54.5%
Family medication type	
Antidepressants	10.5%
Antipsychotics	5.5%
Mood stabilizers	2.5%
Other	81.5%
Family duration of illness (years)	15.5 ± 7.5
Family family history	
Yes	25.5%
No	74.5%
Family family size	4.5 ± 2.5
Family family income (USD/month)	1,800 ± 500
Family family education (years)	14.5 ± 5.5
Family family health status	
Good	45.5%
Fair	45.5%
Poor	9.0%
Family family comorbidities	
Hypertension	35.5%
Diabetes	25.5%
Cholesterol	15.5%
Arthritis	5.5%
Depression	2.5%
Family family medication use	
Yes	35.5%
No	64.5%
Family family medication type	
Antidepressants	5.5%
Antipsychotics	2.5%
Mood stabilizers	1.5%
Other	90.5%
Family family duration of illness (years)	20.5 ± 10.5

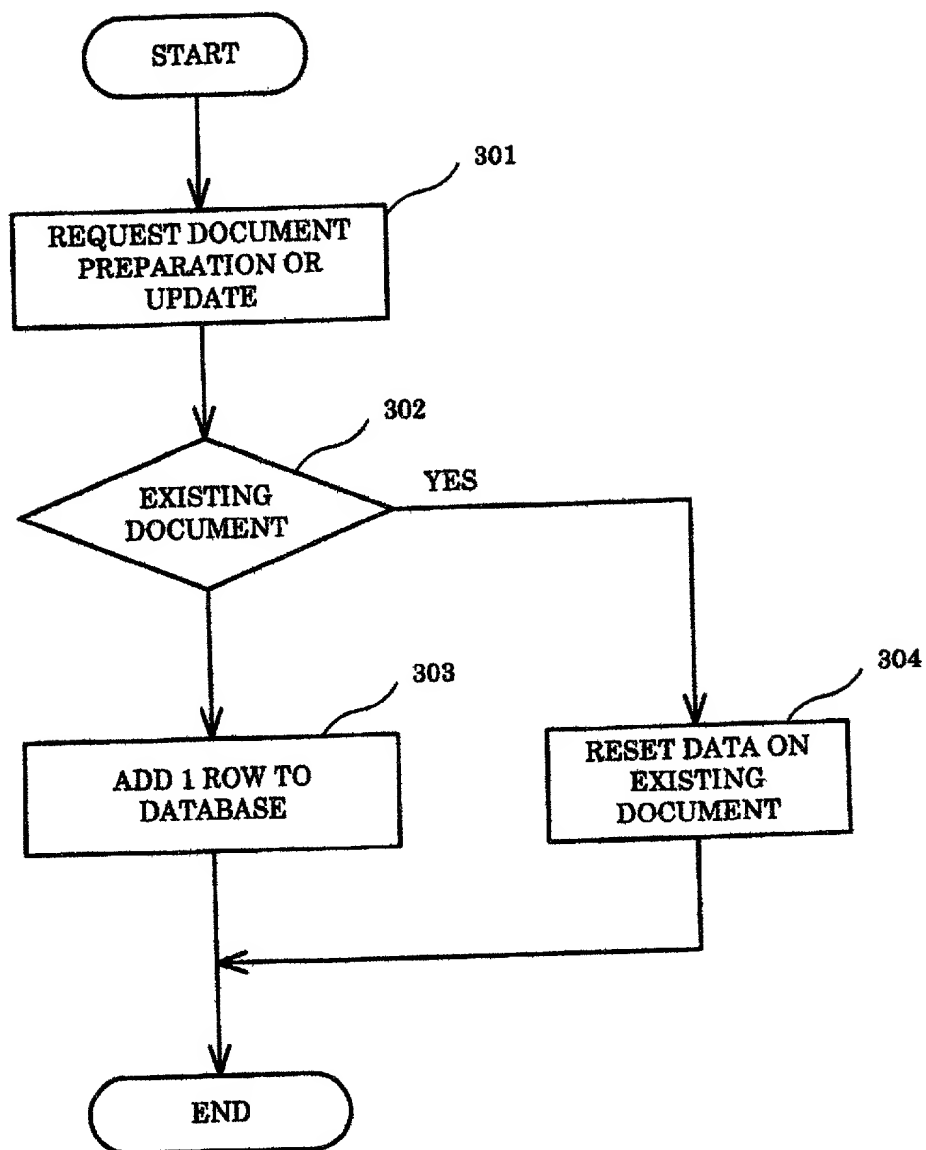

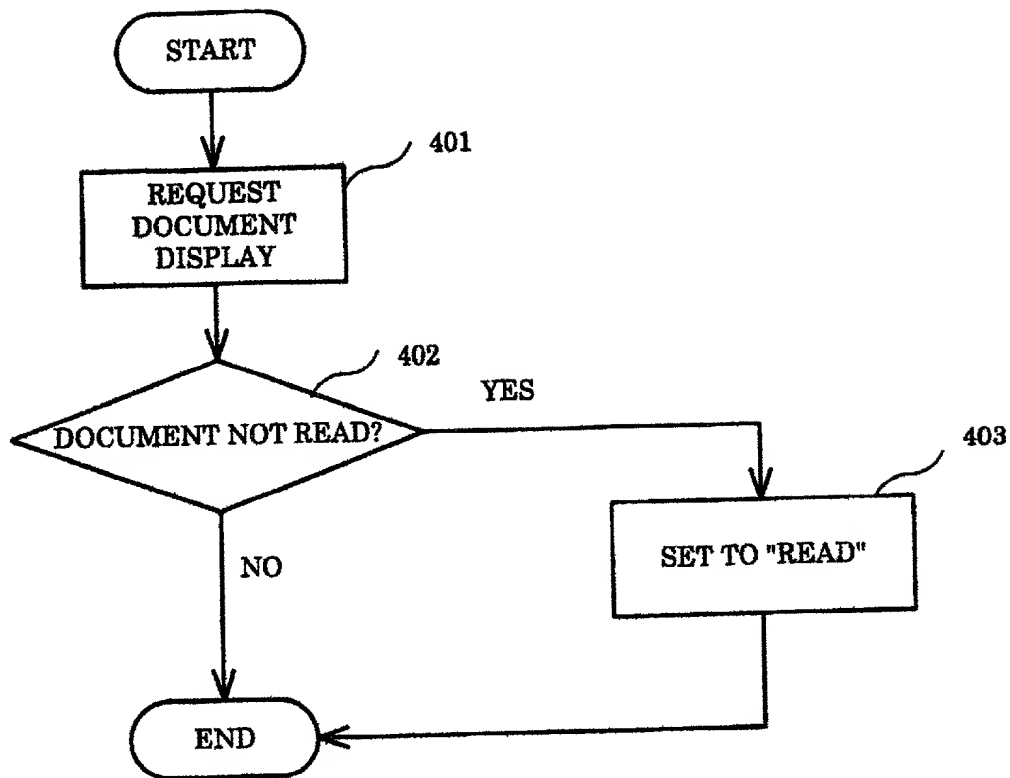


FIG. 7

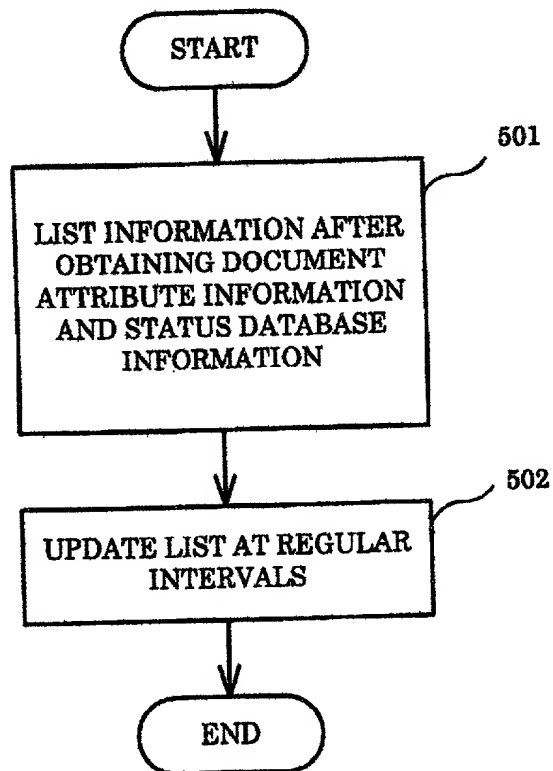


FIG. 8

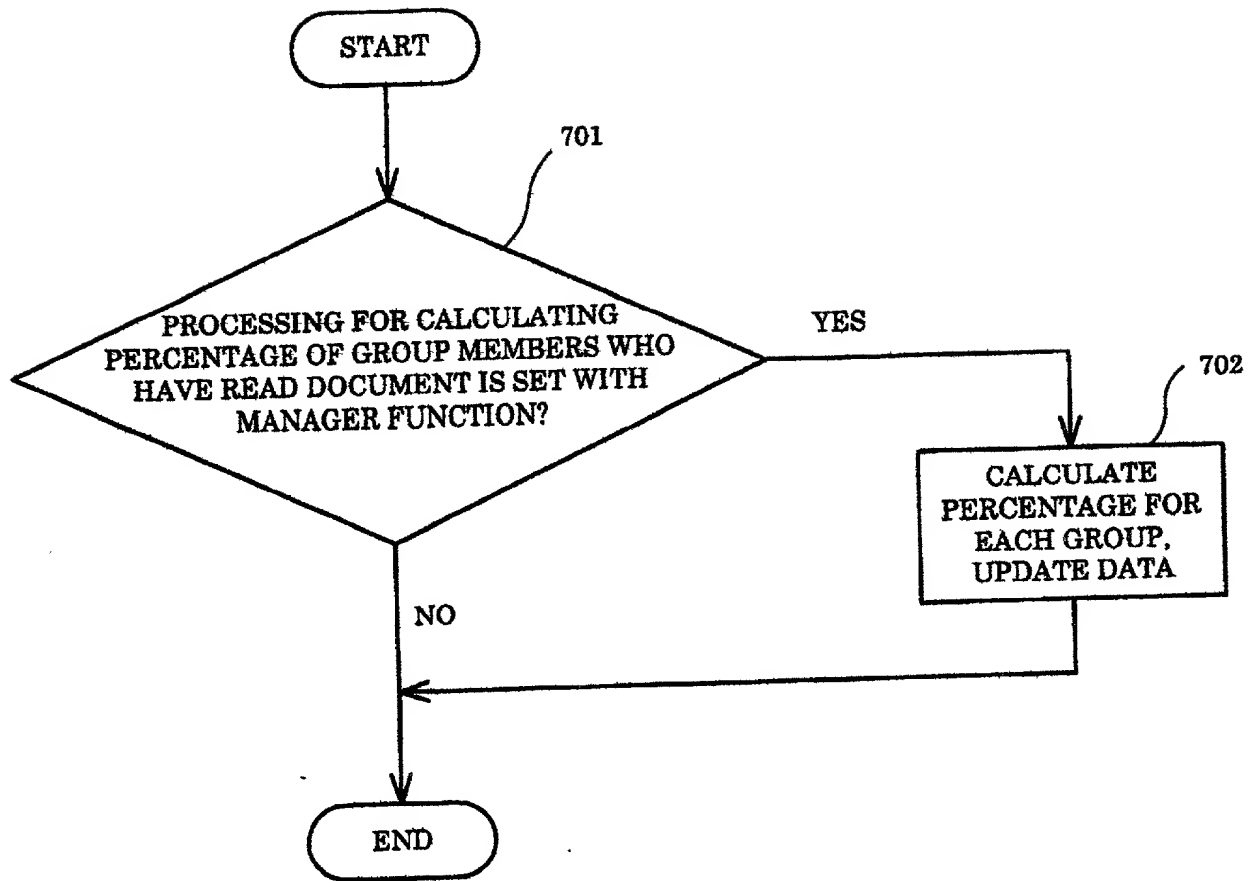


FIG. 9

	A-GROUP	B-GROUP	C-GROUP
DOCUMENT 1	30%	50%	60%
DOCUMENT 2	10%	30%	50%
DOCUMENT 3	40%	60%	80%

FIG. 10

USER NAME	ENTRY USER	DEFAULT USER
A-USER	YES	1
B-USER	YES	2
C-USER	YES	3
D-USER	YES	4
....	
....	
....	
Z-USER	NO	

006250" E8892950

FIG. 11

CLIENT SCREEN USER NAME	ORDER OF INDICATION 1	ORDER OF INDICATION 2	ORDER OF INDICATION 3
C-USER	A-USER	B-USER		
D-USER	A-USER	B-USER	E-USER	

006260 " E8897950

FIG. 12

USER NAME	GROUP NAME
A-USER	A-GROUP
B-USER	A-GROUP
C-USER	A-GROUP
D-USER	B-GROUP
....
....
....
Z-USER	J-GROUP

FIG. 13

GROUP NAME	ORDER OF INDICATION
A-GROUP	1
B-GROUP	2
C-GROUP	3
D-GROUP	4

FIG. 14



005260-EB252960

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD OF INDICATING USER STATUS IN GROUPWARE AND APPARATUS FOR USE IN THE SAME

the specification of which (check one)

☐ is attached hereto.

☐ was filed on _____ as United States Application Number _____
for PCT International Application Number _____
and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application, having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	Priority Claimed
<u>11-277817</u> <u>Japan</u> <u>30 September 1999</u> <input checked="" type="checkbox"/> Yes	
(Number)	(Country) (Day/Month/Year Filed)

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)
----------------------	---------------

I hereby claim the benefit under 35 U.S.C. §120 of any United States Application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States, or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in 37 CFR §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
--------------------------	---------------	---

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).

Manny W. Schecter (Reg. 31,722), Terry J. Ilardi (Reg. 29,936), Christopher A. Hughes (Reg. 26,914), Edward A. Pennington (Reg. 32,588), John E. Hoel (Reg. 26,279), Joseph C. Redmond, Jr. (Reg. 18,753), Kevin M. Jordan (Reg. 40,277), Stephen C. Kaufman (Reg. 29,551), Jay P. Sbröllini (Reg. 36,266), David M. Shofi (Reg. 39,835), Louis P. Herzberg (Reg. 41,500), Daniel P. Morris (Reg. 32,053), Paul J. Otterstedt (Reg. 37,411), Douglas W. Cameron (Reg. 31,596), Wayne Ellenbogen (Reg. 43,602), and Robert M. Trepp (Reg. 25,933).

Send Correspondence to: Anne Vachon Dougherty, 3173 Cedar Road
Yorktown Heights, New York 10598

Direct Telephone Calls to: (name and telephone number) Anne Vachon Dougherty (914) 962-5910

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Nobuaki

~~Nobuaki~~ Takishita

Full name of first inventor

Nobuaki Takishita

July 31, 2000

Inventor's Signature

Date

8-6-14-303 Higashirinkan, Sagamihara-shi, Kanagawa-ken, Japan

Residence

Japan

Citizenship

8-6-14-303 Higashirinkan, Sagamihara-shi, Kanagawa-ken, Japan

Post Office Address

006260-00000000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Nobuyuki Takishita et al.

Date:

Serial No.:

Group Art Unit:

Filed: Herewith

Examiner:

For: METHOD OF INDICATING USER STATUS IN GROUPWARE
AND APPARATUS FOR USE IN THE SAME

ASSOCIATE POWER OF ATTORNEY

Assistant Commissioner of Patents
Washington, D.C. 20231

Dear Sir:

The undersigned attorney, who has been appointed as an attorney in the combined Declaration and Power of Attorney in the above-identified application, hereby appoints Anne V. Dougherty, Reg. No. 30,374, as attorney to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. All correspondence should be directed to Anne V. Dougherty, 3173 Cedar Road, Yorktown Heights, New York 10598. Telephone calls should be directed to Anne V. Dougherty at (914) 962-5910.

Respectfully submitted,

Wayne L. Ellenbogen

Wayne L. Ellenbogen
Attorney for Applicant
Reg. No. 43,602
(914) 945-3244

IBM Thomas J. Watson Research Center
P. O. Box 218 - 39-255
Yorktown Heights, NY 10598